

MANUFACTURER:



DRAWN BY:

CHECKED BY:

PRODUCT TITLE:


REINFORCED CONCRETE MANHOLES

MULTIPLE INLETS/OUTLETS
MANHOLES


PAGE

1

PRODUCT DATA SHEET

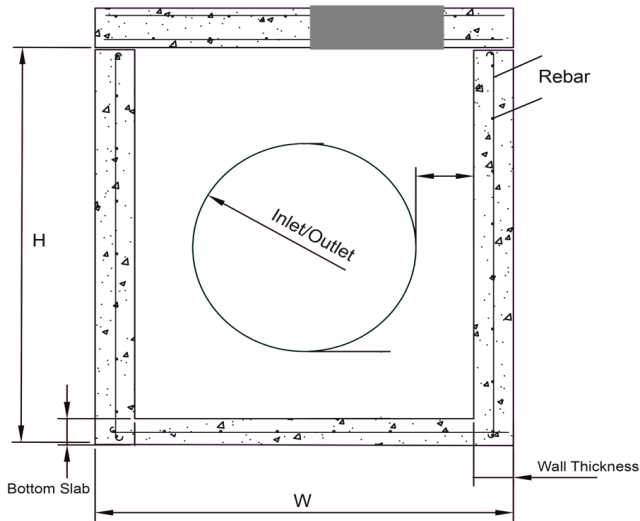

SECTION A-A

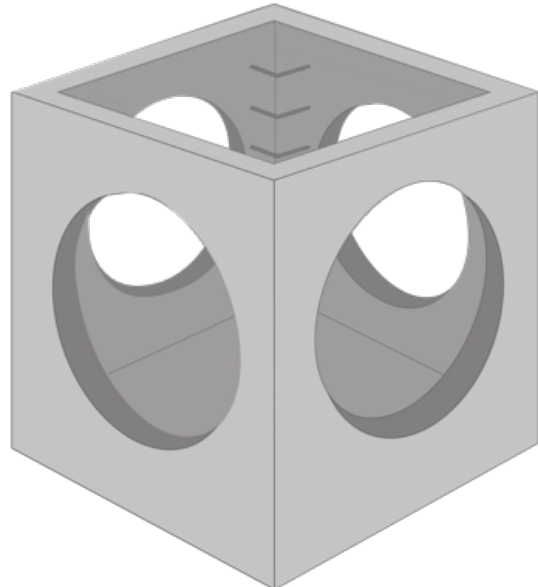

ISOMETRICS VIEW

ID	WIDTH (MM)	LENGTH (MM)	HEIGHT (MM)	Wall Thickness (MM)	INLET/OUTLET (MM)	WEIGHT (KG)
600	1080	1480	1500	140	790	2530
800	1080	1480	1500	140	1030	2060
1000	1970	1970	1970	150	1270	5350
1200	2210	2210	2210	150	1551	6565
1500	2400	2400	2550	150	1850	6960

NOTES:

1. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS
2. MATERIALS
 - 2.1 CONCRETE SHALL BE CUBE STRENGTH TEST WITH CHARACTERISTIC STRENGTH IN MPa AT 28 DAYS
 - 2.2 REBARS
 - YIELD STRENGTH IN MPa
 - TENSILE STRENGTH IN MPa
3. DESIGN LOAD AASHTO HS20 OR AS SPECIFIED
4. CONCRETE STRENGTH IS 32MPa @ 28 DAYS