


**MANUFACTURER:****DRAWN BY:****CHECKED BY:****PRODUCT TITLE:**


REINFORCED CONCRETE MANHOLES

SINGLE OR DUAL INLETS/OUTLETS  
MANHOLES**PAGE****1**

## PRODUCT DATA SHEET

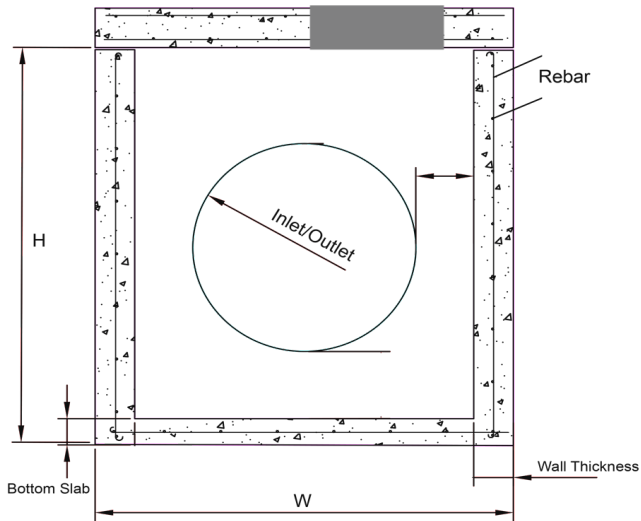

SECTION A-A

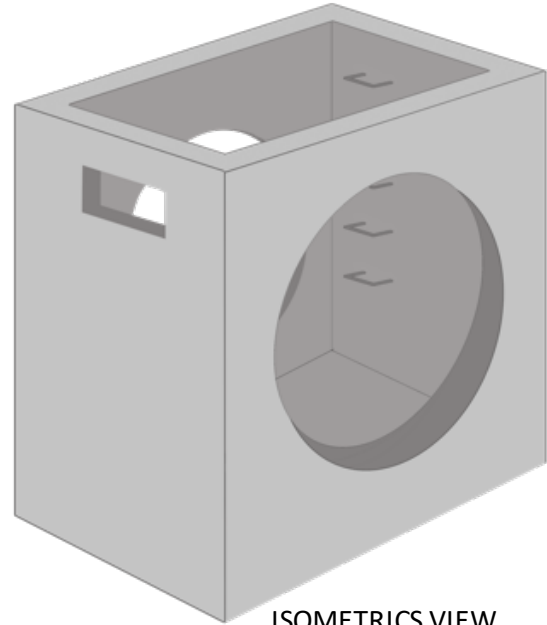

ISOMETRICS VIEW

ID	WIDTH (MM)	LENGTH (MM)	HEIGHT (MM)	Wall Thickness (MM)	INLET/OUTLET (MM)	WEIGHT (KG)
600	1080	1480	1500	140	790	2870
800	1080	1480	1500	140	1030	2630
1000	1500	1970	1970	150	1270	5250
1200	1500	2210	2210	150	1551	6130
1500	1500	2400	2550	150	1850	6960

**NOTES:**

1. ALL DIMENSIONS SUBJECT TO ALLOWABLE SPECIFICATION TOLERANCES AND PARAMETERS
2. MATERIALS
  - 2.1 CONCRETE SHALL BE CUBE STRENGTH TEST WITH CHARACTERISTIC STRENGTH IN MPa AT 28 DAYS
  - 2.2 REBARS
    - YIELD STRENGTH IN MPa
    - TENSILE STRENGTH IN MPa
3. DESIGN LOAD AASHTO HS20 OR AS SPECIFIED
4. CONCRETE STRENGTH IS 32MPa @ 28 DAYS